



Specifications

MP-045 Meter

Liquid Controls MP Series Bi-Rotor Positive Displacement (PD) Meters offer the ultimate in measurement accuracy for custody transfer of petroleum and aviation fuels.

Superior performance features

Low pressure drop – the straight-through path and floating rotor design creates a very low pressure drop at maximum flow.

Sustained accuracy – no metal-to-metal contact inside the measuring chamber means minimal wear and deterioration in accuracy over time, fewer recalibrations and a longer service life.

Wide viscosity range – LC meters can accurately meter products up to 1000 cP (please consult factory for higher viscosity).

Compact design – no upstream or downstream pipe lengths are necessary.

Double case construction – the measuring unit is removable, as a single subassembly, from the outer flanged.

Low piping vibration – the bi-rotor design produces very low piping vibrations permitting to reach higher flowrates.

Accuracy/Performance

Repeatability

Mechanical registration: capable of 0.05% of reading over entire range
Electronic registration: capable of 0.03% of reading over entire range

Linearity

Over 5:1 range

Mech. registration: capable of $\pm 0.125\%$ or better from max. nom. flow rate
Elect. registration: capable of $\pm 0.10\%$ or better from max. nom. flow rate

Over 10:1 range

Mech. registration: capable of $\pm 0.22\%$ or better from max. nom. flow rate
Elect. registration: capable of $\pm 0.10\%$ or better from max. nom. flow rate

Over 40:1 range

Mech. registration: capable of $\pm 0.5\%$ or better from max. nom. flow rate
Elect. registration: capable of $\pm 0.15\%$ or better from max. nom. flow rate

Temperature range

-2.2° F to 356° F (-29° C to 180° C)

Note: with POD installed directly on the meter, temperature range is reduced to: -2.2° F to 185°F (-29° C to 85 °C)

Industries served

LC MP-Series meters are well-suited for use in industries requiring precise flow measurement and reliable, extended service life:

- Refined petroleum products
- Crude oil
- LPG
- Power plant
- Petrochemicals

Construction Class 1, 8, 14

External housing:

Carbon steel ASTM A216 WCB

External cover:

Carbon steel ASTM A216 WCB

Housing:

Cast iron (1, 14)
316 stainless steel (8)

Bearing plate:

Cast iron (1, 14)
316 stainless steel (8)

Sleeve bearing:

Carbon/420 stainless steel (1, 14)
Carbon/316 stainless steel (8)

Rotors:

Cast iron (1, 14)
316 stainless steel (8)

Gear:

420 stainless steel (1, 14)
316 stainless steel (8)

Internal hardware:

Stainless steel


Seal material:

Teflon

Packing gland:

Stainless steel/teflon

Dimensions: flow meters with mechanical registration

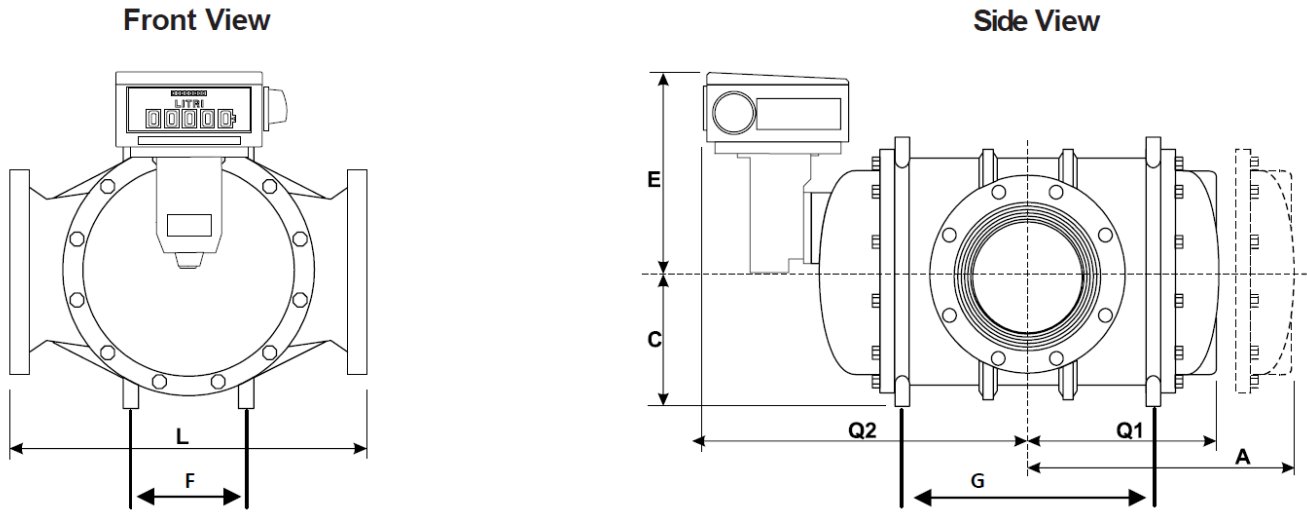


Model	Flow rate	Flange size	Net weight	Max working pressure	Dimensions		
						A	C
MP045	Intermittent (1): 1982 GPM (450 m ³ /h)	8" ANSI 150	849 lbs (385 kg)	19 bar @ -29°C to 38°C	in mm	27.6 700	9.6 245
				18 bar @ -29°C to 85°C	in mm	27.6 700	9.6 245
				14 bar @ -29°C to 180°C	in mm	27.6 700	9.6 245
	Nominal (2): 1585 GPM (360 m ³ /h)	8" ANSI 300	1058 lbs (480 kg)	49 bar @ -29°C to 38°C	in mm	27.6 700	9.6 245
				47 bar @ -29°C to 85°C	in mm	27.6 700	9.6 245
				44 bar @ -29°C to 180°C	in mm	27.6 700	9.6 245

Dimensions							
	E	Q1	Q2	L	F	G	
in	12.7	13.2	23.3	25.2	7.95	16.1	
mm	322	335	591	640	202	410	
in	12.7	13.2	23.3	25.2	7.95	16.1	
mm	322	335	591	640	202	410	
in	12.7	13.2	23.3	16	7.95	16.1	
mm	322	335	591	660	202	410	
in	12.7	13.2	23.3	16	7.95	16.1	
mm	322	335	591	660	202	410	
in	12.7	13.2	23.3	16	7.95	16.1	
mm	322	335	591	660	202	410	

Note (1): Maximum intermittent flow rate (batch use) means 8/24 hours of operation per day.

Note (2): Maximum nominal flow rate (continuous use) means 24/24 hours of operation per day.

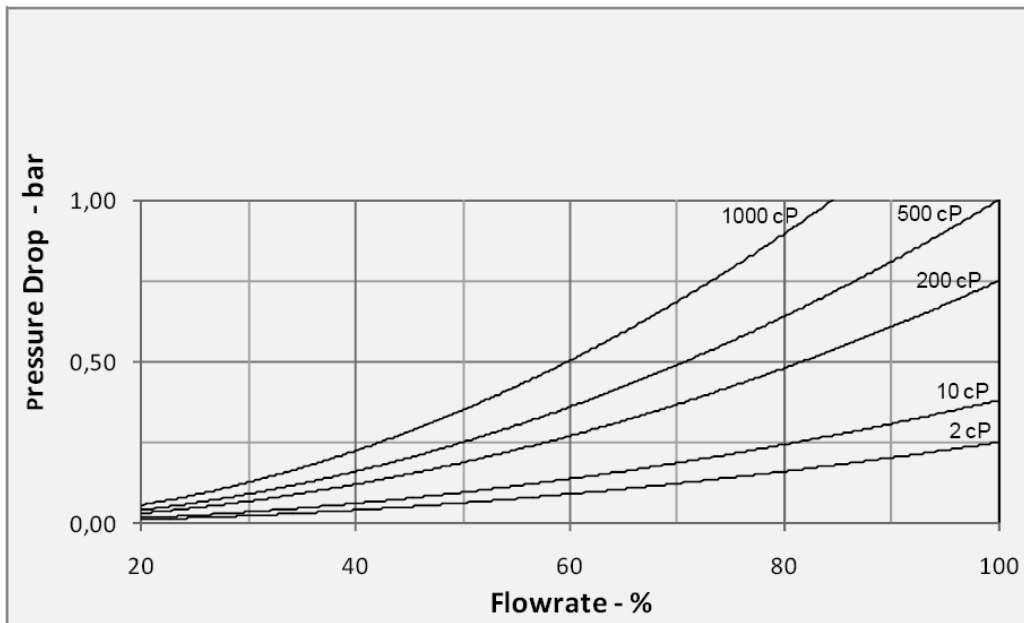

Construction and application classes

LC MP series PD meters are suitable for metering a broad range of products as listed below. The appropriate meter class can be used to specify a desired meter by using the table below.

Class	Description
1	Refined petroleum products
8	Acid pH liquids includes: nitric, phosphoric, glacial acetic acids, citric juices, vinegar
14	Crude oil

Ordering Information MP045

Company Name: _____

Contact: _____

Service Description: _____

Flowrates: Max.: _____ Normal _____ Min. _____

Operating temperatures: Max.: _____ Normal _____ Min. _____

Maximum non-shock operating pressure: _____

Maximum viscosity: _____ @ _____ (Temp°/F or C)

Specific gravity: _____ @ _____ (Temp°/F or C)

Class: 1 8 14

Direction of flow: L to R R to L

Unit of Measure: Decaliter m³/h US Gal

Flange size: 8"

Flange type: ANSI150 ANSI300

Options: _____